



## **Nexion interprets Wood**

ESSENZE COLLECTION

Essenze brings the intense taste of four precious woods that are highly appreciated in the architectural field for their ability to combine solidity and durability with refined natural elegance. Through extensive researches, Nexion has selected some of the most renowned varieties of Eucalyptus, Walnut, Middle Oak and Tortora Oak, characterized by fascinating patterns of knots, veins, nuances and other natural elements.

Inspired by their beauty, Nexion has devised a new sintered surface that transmits all the wood warmth and elevate its technical features. Among those, this surface is extremely durable, highly resistant to chemicals, stains and abrasions which makes it particularly suitable for high traffic public spaces. Essenze is offered in 20x120 size to be even more bonded to its natural inspiration.

The result is a collection that interprets the spontaneous and authentic charm of prestigious essences with a modern language, making it functional to the realization of the most ambitious projects. Essenze brings the best inspiration of contemporary Italian design in every type of space and setting.

## **Nexion about**

Nexion is a brand of Nexion International, a multinational ceramic company that is the result of a partnership between two large family groups that have always been leaders in their reference markets: Ceramiche Speranza, the best in its class Italian firm founded in 1961, that has setup the state of the art manufacturing facilities in India together with the Aghara family, one of the leading players in ceramics and sanitary ware in India since 1977.

With mastery of technology and design, we turn the best of the Italian tradition and lifestyle into contemporary ceramic surfaces that can be source of inspiration for architects and designers around the world.

Open-minded and keen to learn from customers and partners, we are committed to deliver the best quality and service and we believe that our work ends when our clients fulfill their desires and achieve their goals.

Headquarter & Indian Sales Nexion International Private Limited 1104, Shapath V, S.G. Road Ahmedabad, Gujarat (India) indiancs@nexiontiles.com www.nexiontiles.com

Design, Marketing & Global Sales
Via 2 Giugno, 13
41042 Fiorano Modenese
Modena (Italy)
globalcs@nexiontiles.com
www.nexiontiles.com



Size

long planks, inspired to natural wood, to recreate the romance of parquet.

20x120 cm



20x120 cm F22ESXBONRO Rovere Chiaro



20x120 cm F22ESXG1NRO Rovere Tortora

## **F22ESXGINRO** Rovere Tortora **Nexion installation suggestions**

Nexion recommends 2 mm joint for optimal aesthetics taking advantage of the tiles caliber in multi-sized applications. Both cement and epoxy grout can be used; grout-design color matching advisable for optimal aesthetics. It is not recommended to use grouting with colored pigments in contrast with the color of the tiles. For detailed installation guidelines log on www.nexiontiles.com

## Nexion quality standards

ALL TESTS ARE CARRIED OUT BY ITALIAN LABORATORIES ACCREDITED ACCORDING TO ISO/IEC 17025:2017 Standards according to ISO 13006: Annex G - EN 14411: Annex G. Dry - Pressed Ceramic Tiles.

| QUALITY<br>ITEMS       | TECHNICAL FEATURE  | STANDARD<br>METHOD ISO | UNIT  | REQUIREMENTS<br>ISO 13006:2018(E) E <sub>V</sub> ≤0.5%<br>GROUP Bla   | NEXION Values                          |          |                           |          |
|------------------------|--|------------------------|-------|---|--|----------|---------------------------|----------|
|                        |  |                        |       |   | SIZE < 1200 mm                         |          | SIZE > 1200 mm<br>(SLABS) |          |
|                        |  |                        |       |   | %                                      | mm       | %                         | mm       |
|                        | Width  | ISO 10545 - 2          | mm    | ± 0.3%  | ± 0.1%                                 | ± 0.8 mm | ± 0.1%                    | ± 1 mm   |
|                        | Length   | ISO 10545 - 2          | mm    | ± 0.3%  | ± 0.1%                                 |          | ± 1.2 mm                  |          |
| DIMENSIONS             | Thickness  | ISO 10545 - 2          | mm    | ± 5.0%  | ± 4%  ± 0.5 mm  ± 4%  ± 0              |          | ± 0.5 mm                  |          |
| AND SURFACE<br>QUALITY | Straightness of Side   | ISO 10545 <b>-</b> 2   | mm    | ± 0.3%  | ± 0.1% ± 0.8 mm ± 0.1% ± 1             |          | ± 1 mm                    |          |
|                        | Rectangularity   | ISO 10545 - 2          | mm    | ± 0.3%  | ± 0.1%                                 | ± 1.3 mm | ± 0.1%                    | ± 1.5 mm |
|                        | Surface Flatness   | ISO 10545 - 2          | mm    | ± 0.4%  | ± 0.1%                                 | ± 1.8 mm | ± 0.2%                    | ± 3 mm   |
|                        | Surface Quality  | ISO 10545 - 2          | -     | A minimum of 95% of the tiles<br>are to be free from visible defects<br>which can impair the appearance of<br>a major area of tiles | 95%                                    |          |                           |          |
|                        | Water Absorption   | ISO 10545 - 3          | %     | ≤ 0.5%,<br>Individual 0.6%  | Avg. ≤ 0.08%,<br>Individual 0.2%       |          |                           |          |
|                        | Modulus of Rupture   | ISO 10545 - 4          | N/mm² | Min. 35, Individual Min. 32   | Min. 42                                |          |                           |          |
|                        | Breaking Strength  | ISO 10545 - 4          | N     | Not less than 1300  | Min. 1800                              |          |                           |          |
|                        | Moisture Expansion   | ISO 10545 - 10         | mm/m  | -   | 0,02                                   |          |                           |          |
|                        | Mohs Hardness of surface   | NA                     | -     | -   | 7                                      |          |                           |          |
| PHYSICAL               | Coefficient of linear thermal expansion from ambient temperature to 100 °C | ISO 10545 - 8          | K-1   | As declared by the Manufacturer   | 6x10 <sup>-6</sup> K <sup>-1</sup> max |          |                           |          |
| PROPERTIES             | Thermal Shock Resistance   | ISO 10545 - 9          | _     | As declared by the Manufacturer   | No damage                              |          |                           |          |
|                        | Crazing Resistance:<br>glazed tiles  | ISO 10545 - 11         | _     | Required  | No damage for<br>Min. 10 Cycles        |          |                           |          |
|                        | Bulk Density   | ISO 10545 - 3          | g/cc  | 2,2   | 2,2                                    |          |                           |          |
|                        | Impact Resistance  | ISO 10545 - 5          | -     | As declared by the Manufacturer   | 0,55                                   |          |                           |          |
|                        | Frost Resistance   | ISO 10545 - 12         | -     | As declared by the Manufacturer   | No change                              |          |                           |          |
|                        | Small color differences  | ISO 10545 - 16         | -     | Plain colored tiles only where<br>required<br>GL: ΔE < 0.75<br>UGL: ΔE < 1.0  | No change                              |          |                           |          |
|                        | Resistance to staining   | ISO 10545 - 14         | Class | Minimum Class 3   | Class 4                                |          |                           |          |
| CHEMICAL<br>PROPERTIES | Resistance to household chemicals and swimming pool salts                  | ISO 10545 - 13         | Class | Minimum B   | Compliant                              |          |                           |          |
|                        | Resistance to acids & alkalis  | ISO 10545 - 13         | Class | As declared by the Manufacturer   | Compliant                              |          |                           |          |

Packaging info
Shipments to domestic mark

| Snipments t        | o domestic ma   | rkets (India) |              |                   |
|--------------------|-----------------|---------------|--------------|-------------------|
| Nominal<br>Size cm | Thickness<br>mm | Pcs. x box    | Sq. mt x box | Weight x box (Kg) |
| 20×120             | 9               | 6             | 1.42         | 30.00             |

| 20/120              |                   | 1,42       | 30,00        |                   |                 |                    |                    |  |  |
|---------------------|-------------------|------------|--------------|-------------------|-----------------|--------------------|--------------------|--|--|
| NA/a wlabodala d    | . h i u u a u t a |            |              |                   |                 |                    |                    |  |  |
| Worldwide shipments |                   |            |              |                   |                 |                    |                    |  |  |
| Nominal<br>Size cm  | Thickness<br>mm   | Pcs. x box | Sq. mt x box | Weight x box (Kg) | Box<br>x pallet | Sq. mt<br>x pallet | Pallet weight (kg) |  |  |
| 20x120              | 9                 | 4          | 0.95         | 20.00             | 40              | 37.92              | 823.00             |  |  |

Size

20x120

19,8x119,8

20x120 9 4 0,95 20,00 40 37,92 82

Tiles are packaged in a random manner and company cannot guarantee the type of faces inside each package.


Full body-colored porcelain stoneware (international standard) | Vitrified stoneware (indian standard). Rectified | 9 mm thickness



20x120 cm **F22ESXFONRO** Noce



20x120 cm **F22ESXF1NRO** Eucalipto

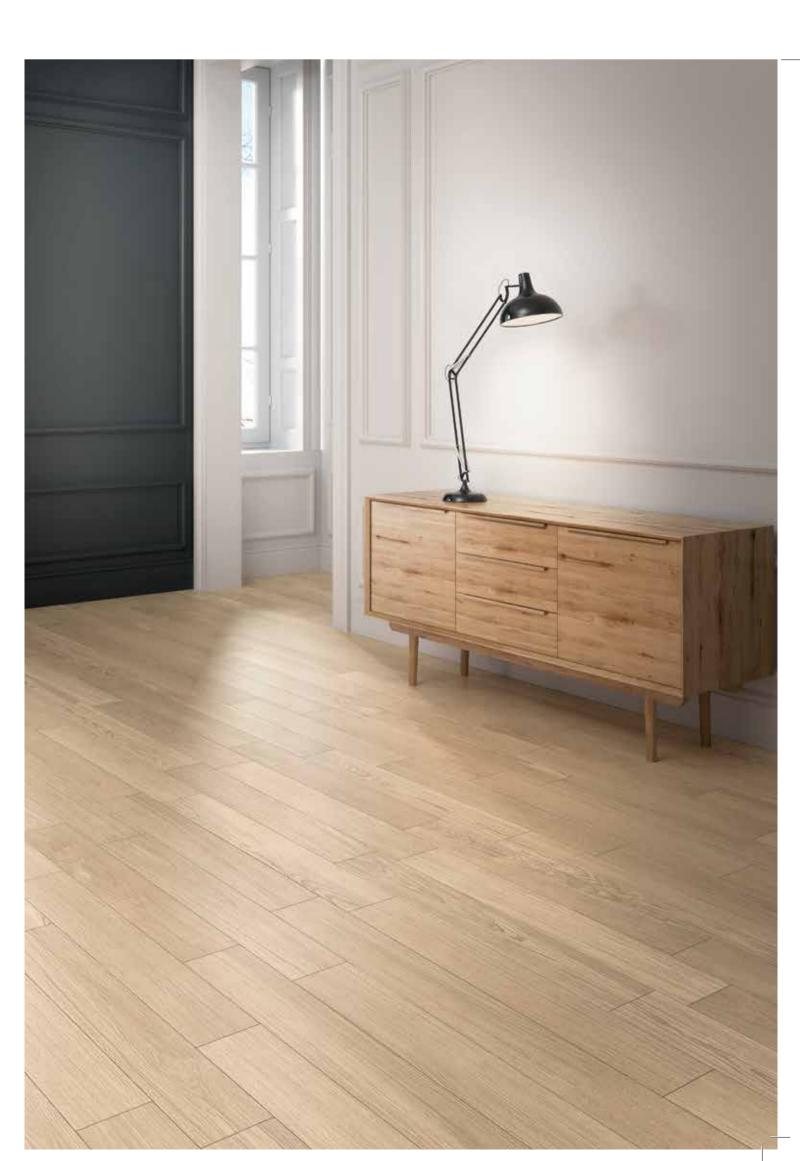

ovember 2021



ROVERE CHIARO available also in Rovere Tortora



NOCE

